




Front View

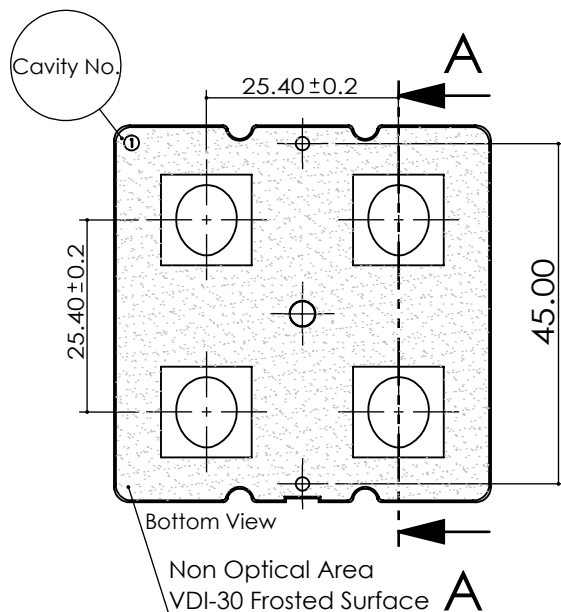


SECTION A-A

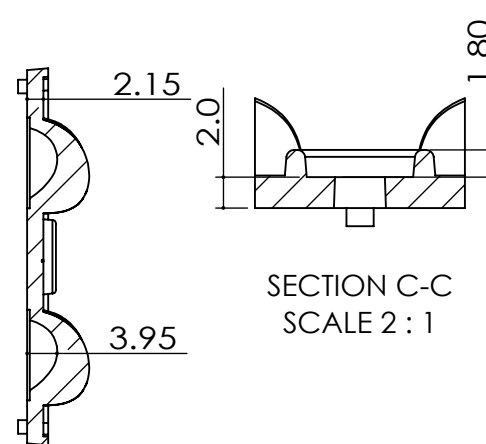

SECTION C-C  
SCALE 2 : 1

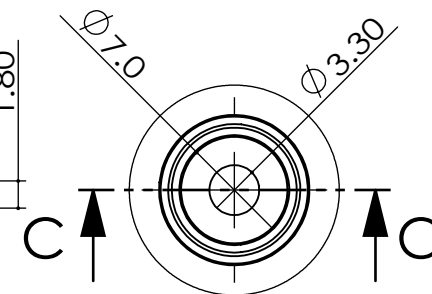



DETAIL B  
SCALE 2 : 1

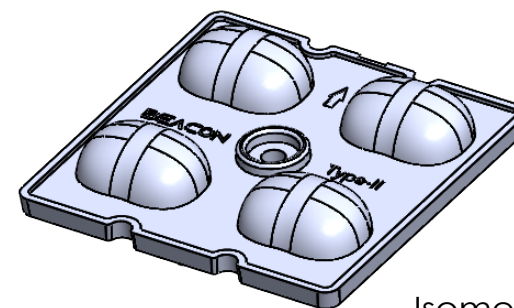

Isometric View

- Lens Material : Polycarbonate(Makrolon 2407&2647/Teijin 1225Z)
- Operating Temperature : PC: -40°C~+110°C(Upper Limit +120°C)
- UL Flammability : PC 2407/1225Z: V-2 @0.75mm & HB @2.7mm
- UL RTI Elec : PC 2407/1225Z: 125°C @1.5mm
- Light Transmission Rate 400nm~900nm > 90%

 <b>BEACON OPTONICS</b> The Shape of Light			<p>Plastic Moulding General Tolerances if not otherwise shown According to DIN ISO 2768-1 Linear measures: up to 30mm class M, otherwise class C According to DIN ISO 2768-2 Form and position: class L</p>		<p>DO NOT SCALE DRAWING</p>		<p>FIRST ANGLE PROJECTION</p> 		
					<b>BEACON OPTONICS</b>				
	NAME	SIGNATURE	DATE	<p>Family</p> <b>Glitter Series</b>  PRT NO. <b>BO3-Glitter-2x2-5050-Type-II</b>					
DRAWN	Ankur Sharma	Ankur Sharma	05.02.2023						
CHK'D	Anuj Sharma	Anuj Sharma	05.02.2023						
APP'VD	Pradyumna Shandilya	Pradyumna	05.02.2023						
MATERIAL:		Polycarbonate(Makrolon 2407,Teijin 1225Z)			<p>DWG NO. <b>BO03</b></p> <p><b>A4</b> REVISION</p>				
<p>1:-All Dimensions are in mm 2:-Open Tolerance is +/- 0.2</p>		<p>This drawing is the property of Beacon Optonics. It may not be reproduced, copied or communicated without a written agreement with Beacon Optonics.</p>							
WEIGHT: 9.5Gm				SCALE:1:1		SHEET 1 OF 1			