



Gate Point



Non Optical Area
VDI-30 Frosted Surface



Side View

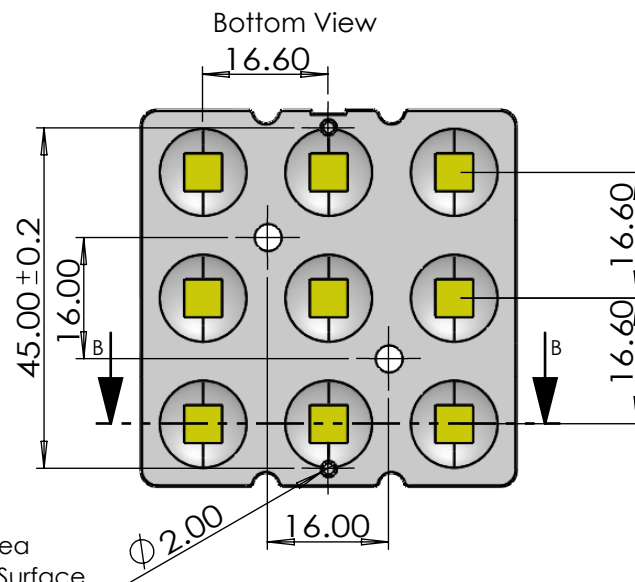

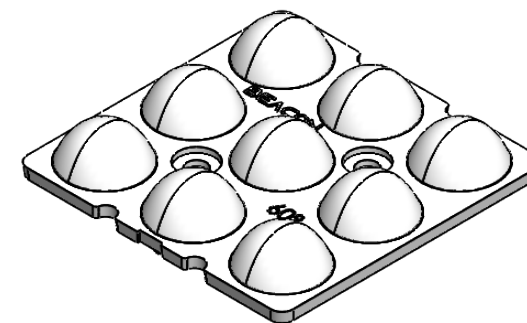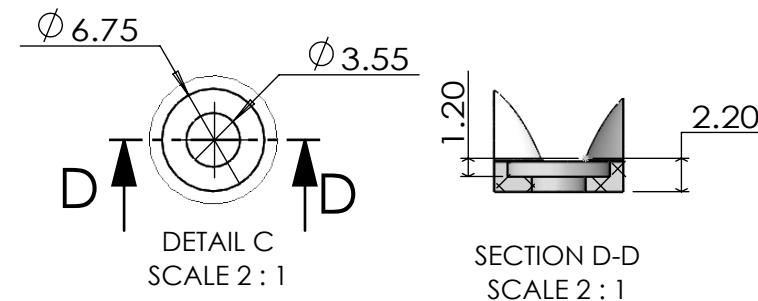

SECTION B-B



Isometric View

- Lens Material : Polycarbonate(Makrolon 2407&2647/Teijin 1225Z)
- Operating Temperature : PC: -40°C~+110°C(Upper Limit +120°C)
- UL Flammability : PC 2407/1225Z: V-2 @0.75mm & HB @2.7mm
- UL RTI Elec : PC 2407/1225Z: 125°C @1.5mm
- Light Transmission Rate 400nm~900nm > 90%

 BEACON OPTRONICS The Shape of Light			<p>Plastic Moulding General Tolerances if not otherwise shown According to DIN ISO 2768-1 Linear measures: up to 30mm class M, otherwise class C According to DIN ISO 2768-2 Form and position: class L</p>		<p>DO NOT SCALE DRAWING</p>		<p>FIRST ANGLE PROJECTION</p> 	
<p>BEACON OPTRONICS</p>								
	NAME	SIGNATURE	DATE	<p>Family</p> <p>Glisten Series</p> <p>PRT NO. BO05-Glisten-3x3-5050-60°</p>				
DRAWN	Ankur Sharma	Ankur Sharma	21.02.2023					
CHK'D	Anuj Sharma	Anuj Sharma	21.02.2023					
APPVD	Pradyumna Shandilya	Pradyumna	21.02.2023					
MATERIAL:		Polycarbonate(Makrolon 2407,Teijin 1225Z)						
<p>1:-All Dimensions are in mm 2:-Open Tolerance is +/- 0.2</p>		<p>This drawing is the property of Beacon Optronics. It may not be reproduced, copied or communicated without a written agreement with Beacon Optronics.</p>		DWG NO.		A4		
				<p>BO05</p>		REVISION		
		WEIGHT: 10.2Gm		SCALE:1:1		SHEET 1 OF 1		