

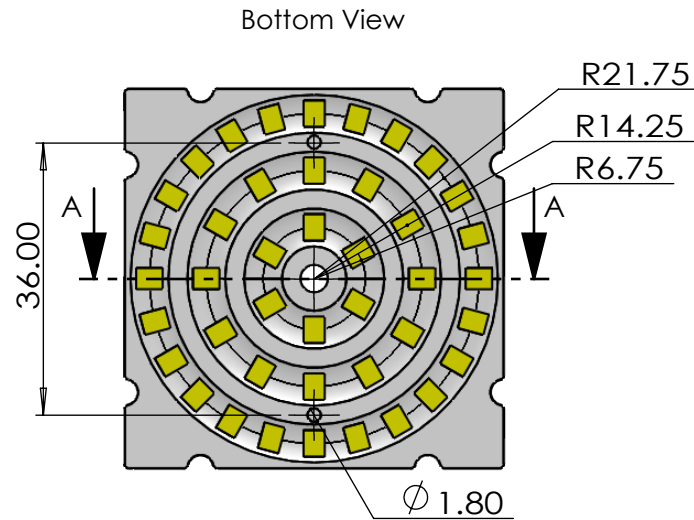


Side View





SECTION A-A

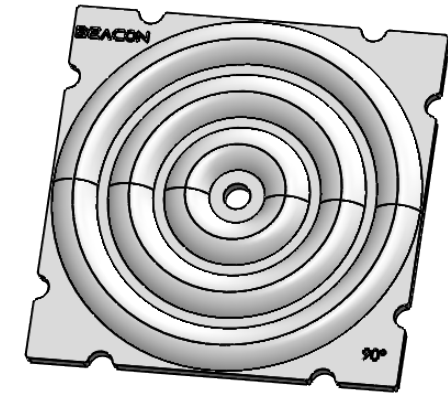

Isometric View

- Lens Material : Polycarbonate(Makrolon 2407&2647/Teijin 1225Z)
- Operating Temperature : PC: -40°C~+110°C(Upper Limit +120°C)
- UL Flammability : PC 2407/1225Z: V-2 @0.75mm & HB @2.7mm
- UL RTI Elec : PC 2407/1225Z: 125°C @1.5mm
- Light Transmission Rate 400nm~900nm > 90%

<div></div> <div>BEACON OPTONICS The Shape of Light</div>				<div>Plastic Moulding General Tolerances if not otherwise shown: According to DIN ISO 2768-1 Linear measures: up to 30mm class M, otherwise class C According to DIN ISO 2768-2 Form and position: class L</div>		<div>DO NOT SCALE DRAWING</div>		<div>FIRST ANGLE PROJECTION</div> <div></div>	
				BEACON OPTONICS					
	NAME	SIGNATURE	DATE	Family Moon Series					
DRAWN	Ankur Sharma	Ankur Sharma	03.11.2024						
CHK'D	Anuj Sharma	Anuj Sharma	03.11.2024	PRT NO. BO131-Moon-2835/3030-90°					
APPV'D	Pradyumna Shandilya	Pradyumna	03.11.2024						
MATERIAL:		Polycarbonate(Makrolon 2407,Teijin 1225Z)		DWG NO. BO131				A4	
1:-All Dimensions are in mm 2:-Open Tolerance is +/- 0.2		This drawing is the property of Beacon Optonics. It may not be reproduced, copied or communicated without a written agreement with Beacon Optonics.						REVISION-00	
				WEIGHT: 7.5 Gm		SCALE:1:1			