



Isometric View



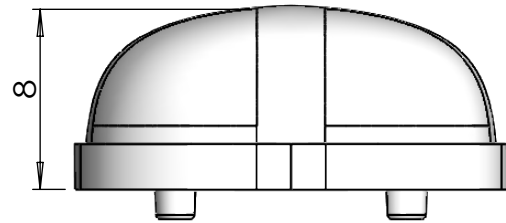


Side View

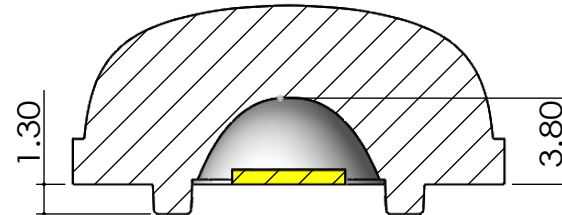

SECTION A-A
SCALE 3 : 1

- Lens Material : Polycarbonate(Makrolon 2407&2647/Teijin 1225Z)
- Operating Temperature : PC: -40°C~+110°C(Upper Limit +120°C)
- UL Flammability : PC 2407/1225Z: V-2 @0.75mm & HB @2.7mm
- UL RTI Elec : PC 2407/1225Z: 125°C @1.5mm
- Light Transmission Rate 400nm~900nm > 90%

 <p>BEACON OPTRONICS The Shape of Light</p>				Plastic Moulding General Tolerances if not otherwise shown According to DIN ISO 2768-1 Linear measures: up to 30mm class M, otherwise class C According to DIN ISO 2768-2 Form and position: class L		DO NOT SCALE DRAWING	FIRST ANGLE PROJECTION	
				BEACON OPTRONICS				
				Family Sunbeam Series				
				PRT NO. BO31-Sunbeam-1x1-5050-Type-II				
				DWG NO. BO31				
				A4				
				REVISION:00				
				SHEET 1 OF 1				

			<p>Plastic Moulding General Tolerances if not otherwise shown According to DIN ISO 2768-1 Linear measures up to 30mm class M, otherwise class C According to DIN ISO 2768-2 Form and position; class</p>
<p>BEACON OPTRONICS The Shape of Light</p>			
	NAME	SIGNATURE	DATE
DRAWN	Ankur Sharma	Ankur Sharma	5.04.2023
CHK'D	Anuj Sharma	Anuj Sharma	5.04.2023
APPV'D	Pradyumna Shandilya	Pradyumna	5.04.2023
MATERIAL:	Polycarbonate(Makrolon 2407,Teijin 1225Z)		
<p>1:-All Dimensions are in mm 2:-Open Tolerance is +/- 0.2</p>	<p>This drawing is the property of Beacon Optronics. It may not be reproduced, copied or communicated without a written agreement with Beacon Optronics.</p>		
	WEIGHT: 1.4Gm		

SCALE:5:1		SHEET 1 OF 1	
-----------	--	--------------	--