



Side View





SECTION A-A

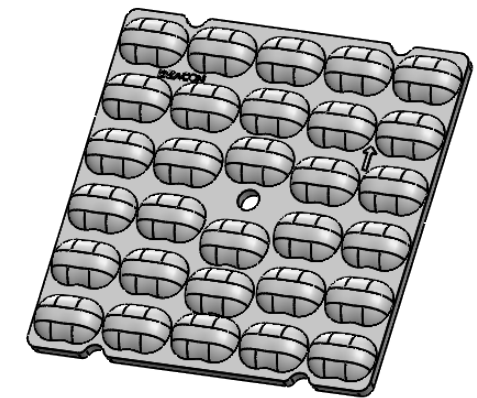

Isometric View

- Lens Material : Polycarbonate(Makrolon 2407&2647/Teijin 1225Z)
- Operating Temperature : PC: -40°C~+110°C(Upper Limit +120°C)
- UL Flammability : PC 2407/1225Z: V-2 @0.75mm & HB @2.7mm
- UL RTI Elec : PC 2407/1225Z: 125°C @1.5mm
- Light Transmission Rate 400nm~900nm > 90%

<div></div> <div>BEACON OPTRONICS The Shape of Light</div>				<div>Plastic Moulding General Tolerances if not otherwise shown: According to DIN ISO 2768-1 Linear measures: up to 30mm class M, otherwise class C According to DIN ISO 2768-2 Form and position: class L</div>				<div>DO NOT SCALE DRAWING</div>		<div>FIRST ANGLE PROJECTION</div> <div></div>		
								BEACON OPTRONICS				
	NAME		SIGNATURE		DATE		Family  Custom Series					
DRAWN	Ankur Sharma		Ankur Sharma		25.04.2023							
CHK'D	Anuj Sharma		Anuj Sharma		25.04.2023		PRT NO.  BO47-30x1-2835/3030-Type-II					
APPV'D	Pradyumna Shandilya		Pradyumna		25.04.2023							
MATERIAL:		Polycarbonate(Makrolon 2407,Teijin 1225Z)										
1:-All Dimensions are in mm  2:-Open Tolerance is +/- 0.2		This drawing is the property of Beacon Optronics. It may not be reproduced, copied or communicated without a written agreement with Beacon Optronics.					DWG NO.		BO47		A4	
											REVISION:00	
							WEIGHT: 7.0 Gm					SCALE:1:1