

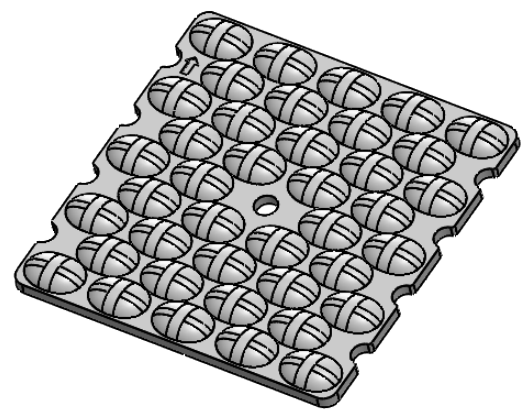




DETAIL B  
SCALE 2 : 1



Isometric View

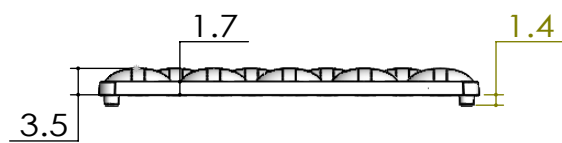

- Lens Material : Polycarbonate(Makrolon 2407&2647/Teijin 1225Z)
- Operating Temperature : PC: -40°C~+110°C(Upper Limit +120°C)
- UL Flammability : PC 2407/1225Z: V-2 @0.75mm & HB @2.7mm
- UL RTI Elec : PC 2407/1225Z: 125°C @1.5mm
- Light Transmission Rate 400nm~900nm > 90%

<div> <b>BEACON OPTRONICS</b> The Shape of Light</div>				<div>Plastic Moulding General Tolerances if not otherwise shown: According to DIN ISO 2768-1 Linear measures: up to 30mm class M, otherwise class C According to DIN ISO 2768-2 Form and position: class L</div>		<div>DO NOT SCALE DRAWING</div>		<div>FIRST ANGLE PROJECTION</div> <div></div>	
				<b>BEACON OPTRONICS</b>					
				Family <b>Oculus Series</b>					
				PRT NO. <b>BO54-Oculus-40x1-2835/3030-Type-II</b>					
MATERIAL: <b>Polycarbonate(Makrolon 2407,Teijin 1225Z)</b>				DWG NO. <b>BO54</b>				A4	
1-All Dimensions are in mm 2-Open Tolerance is +/- 0.2				This drawing is the property of Beacon Optronics. It may not be reproduced, copied or communicated without a written agreement with Beacon Optronics.				REVISION:00	
WEIGHT: 6.0Gm				SCALE:1:1				SHEET 1 OF 1	