
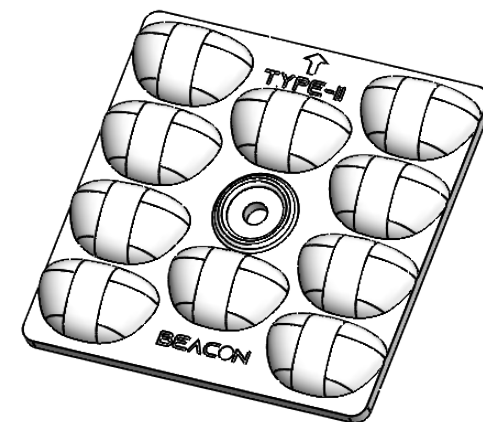



SECTION B-B

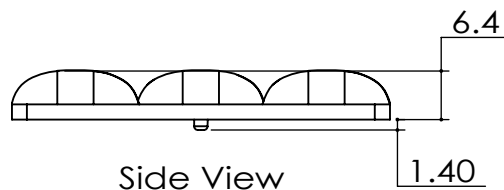

Isometric View





Side View

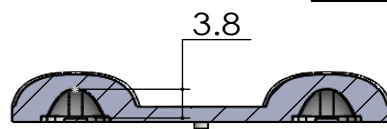

SECTION A-A

- Lens Material : Polycarbonate(Makrolon 2407&2647/Teijin 1225Z)
- Operating Temperature : PC: -40°C~+110°C(Upper Limit +120°C)
- UL Flammability : PC 2407/1225Z: V-2 @0.75mm & HB @2.7mm
- UL RTI Elec : PC 2407/1225Z: 125°C @1.5mm
- Light Transmission Rate 400nm~900nm > 90%

<div><p><b>BEACON OPTONICS</b> The Shape of Light</p></div>				<p>Plastic Moulding General Tolerances if not otherwise shown According to DIN ISO 2768-1 Linear measures: up to 30mm class M, otherwise class C According to DIN ISO 2768-2 Form and position: class L</p>		<p>DO NOT SCALE DRAWING</p>		<p>FIRST ANGLE PROJECTION</p> <div></div>	
						<p><b>BEACON OPTONICS</b></p>			
	NAME	SIGNATURE	DATE	<p>Family</p> <p><b>Galaxy Series</b></p> <p>PRT NO. <b>BO55-Galaxy-10x1-5050-Type-II</b></p> <p>DWG NO. <b>BO55</b></p> <p>A4</p> <p>REVISION:00</p>					
DRAWN	Ankur Sharma	Ankur Sharma	17.10.2023						
CHK'D	Anuj Sharma	Anuj Sharma	17.10.2023						
APPVD	Pradyumna Shandilya	Pradyumna	17.10.2023						
MATERIAL:	Polycarbonate(Makrolon 2407,Teijin 1225Z)								
<p>1:-All Dimensions are in mm 2:-Open Tolerance is +/- 0.2</p>	<p>This drawing is the property of Beacon Optonics. It may not be reproduced, copied or communicated without a written agreement with Beacon Optonics.</p>								
				WEIGHT: 10Gm			SCALE:1:1		SHEET 1 OF 1