
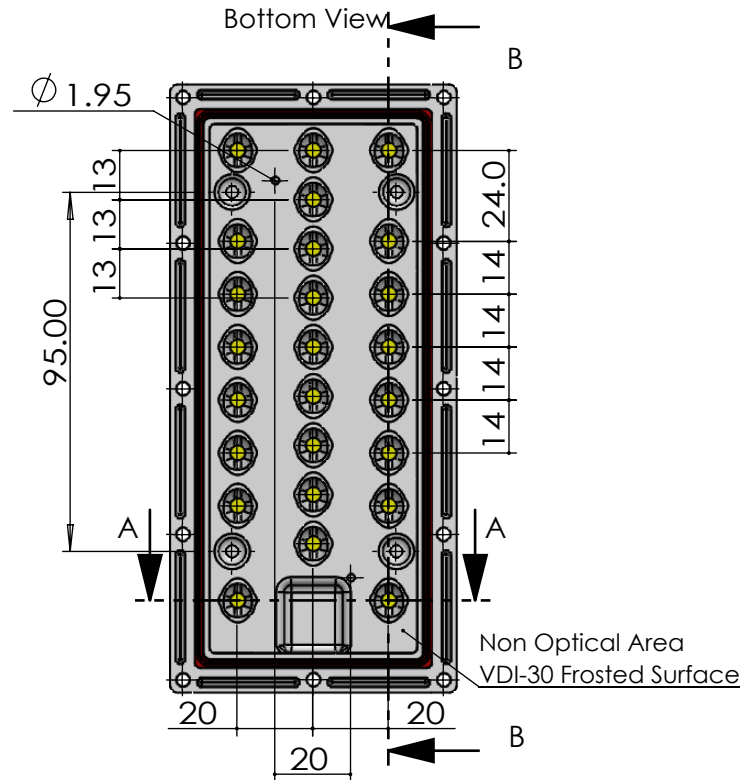



Side View

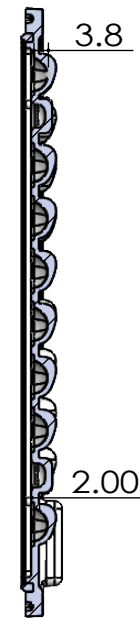

SECTION A-A





SECTION B-B

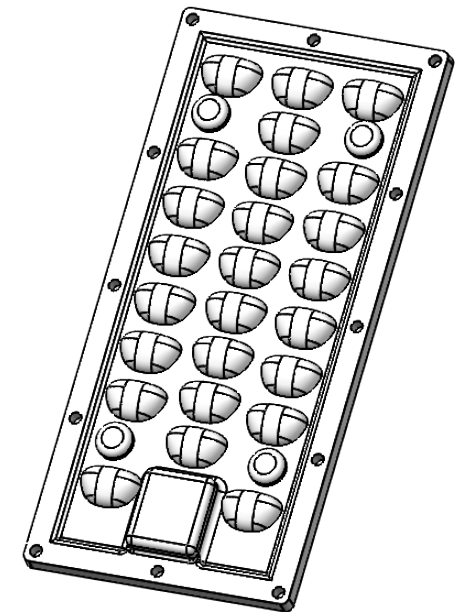

Isometric View

- Lens Material : Polycarbonate(Makrolon 2407&2647/Teijin 1225Z)
- Operating Temperature : PC: -40°C~+110°C(Upper Limit +120°C)
- UL Flammability : PC 2407/1225Z: V-2 @0.75mm & HB @2.7mm
- UL RTI Elec : PC 2407/1225Z: 125°C @1.5mm
- Light Transmission Rate 400nm~900nm > 90%

 BEACON OPTRONICS The Shape of Light			Plastic Moulding General Tolerances if not otherwise shown According to DIN ISO 2768-1 Linear measures: up to 30mm class M, otherwise class C According to DIN ISO 2768-2 Form and position: class L		DO NOT SCALE DRAWING		FIRST ANGLE PROJECTION				
BEACON OPTRONICS											
<div>DRAWN</div> <div>CHK'D</div> <div>APPV'D</div>	NAME	SIGNATURE	DATE	Family	Custom Series						
	Ankur Sharma	Ankur Sharma	22.12.2023								
	Anuj Sharma	Anuj Sharma	22.12.2023		PRT NO.	BO67-Custom-25x1-5050-Type-II					
	Pradyumna Shandilya	Pradyumna	22.12.2023								
MATERIAL:	Polycarbonate(Makrolon 2407,Teijin 1225Z)			DWG NO.	BO67				A4		
1:-All Dimensions are in mm 2:-Open Tolerance is +/- 0.2	This drawing is the property of Beacon Optronics. It may not be reproduced, copied or communicated without a written agreement with Beacon Optronics.										REVISION:00
									WEIGHT: 47.4Gm	SCALE:1:2	