

D

D

C




C

B


B

A


A

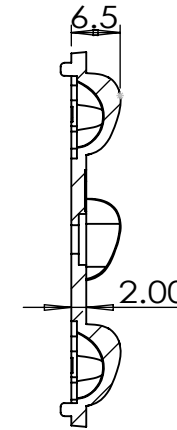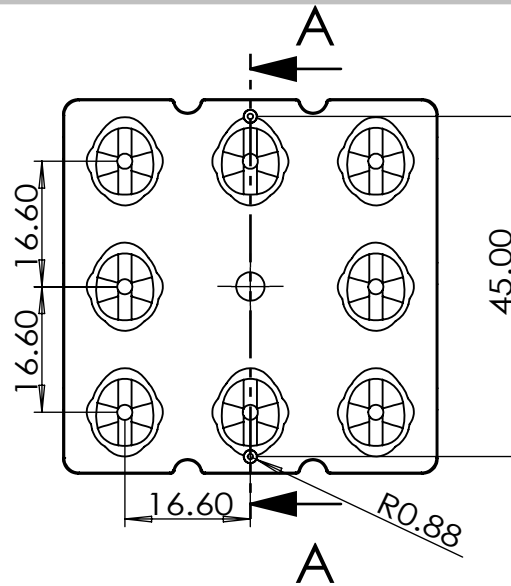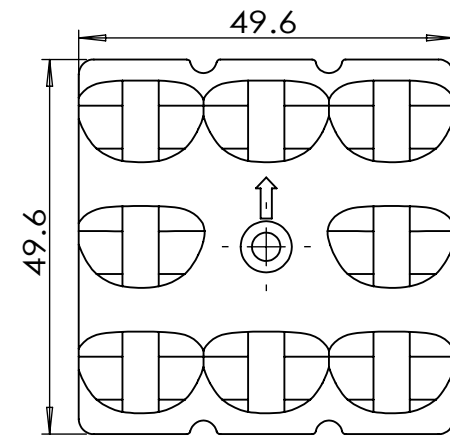


SECTION A-A

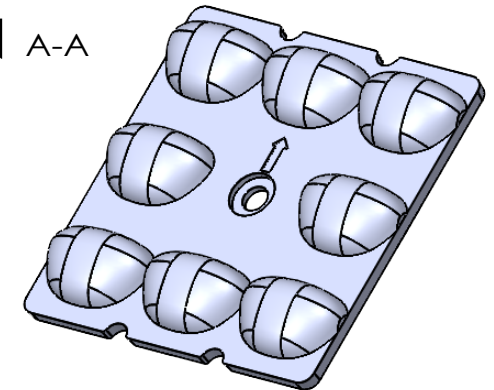

- Lens Material : Polycarbonate(Makrolon 2407&2647/Teijin 1225Z)
- Operating Temperature : PC: -40°C~+110°C(Upper Limit +120°C)
- UL Flammability : PC 2407/1225Z: V-2 @0.75mm & HB @2.7mm
- UL RTI Elec : PC 2407/1225Z: 125°C @1.5mm
- Light Transmission Rate 400nm~900nm > 90%

<div></div> <div>BEACON OPTRONICS The Shape of light</div>			<div>Tolerances if not otherwise shown According to DIN ISO 2768-1 Linear measures: up to 30mm class M, otherwise class C. According to DIN ISO 2768-2 Form and position: class L</div>			DO NOT SCALE DRAWING		REVISION			
						BEACON OPTRONICS					
						Jupiter Series					
						BO22-Jupiter-8x1-5050-Type-II					
						DWG NO.		BO-022		A4	
						SCALE:1:1		SHEET 1 OF 1			

			Tolerances if not otherwise shown: According to DIN ISO 2768-1 Linear measures up to 30mm class M, otherwise class C. According to DIN ISO 2768-2 Form and position: class L	
<b>BEACON OPTRONICS</b> The Shape of light				
	NAME	SIGNATURE	DATE	
DRAWN	Ankur Sharma	Ankur Sharma	5.04.2023	
CHK'D	Anuj Sharma	Anuj Sharma	5.04.2023	
APPV'D	Pradyumna Shandilya	Pradyumna	5.04.2023	
MATERIAL:	Polycarbonate(Makrolon 2407,Teijin 1225Z)			
All Dimensions are in mm Open Tolerance is +/- 0.2	This drawing is the property of Beacon Optronics. It may not be reproduced, copied or communicated without a written agreement with Beacon Optronics.			
WEIGHT: 10Gm				