




B

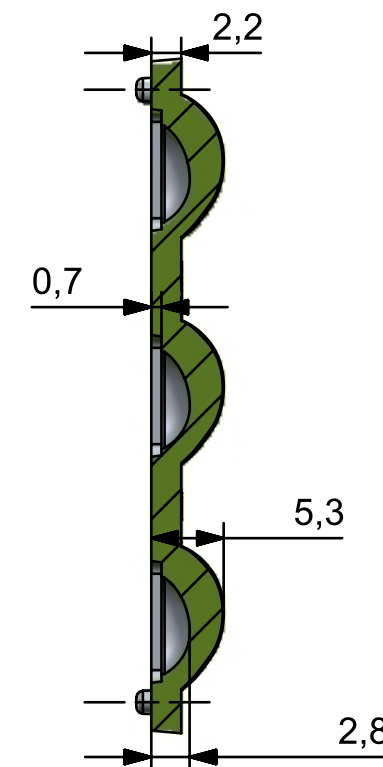


SECTION B-B

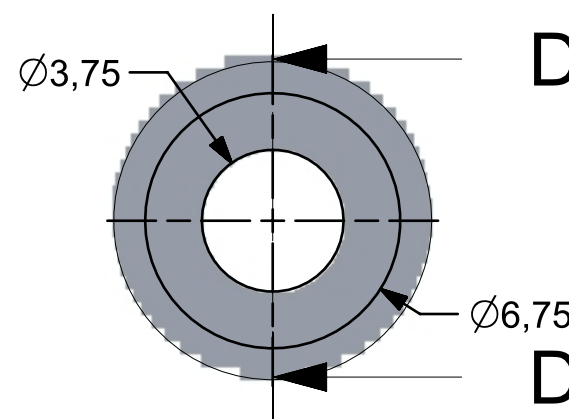

DETAIL C
SCALE 5:1

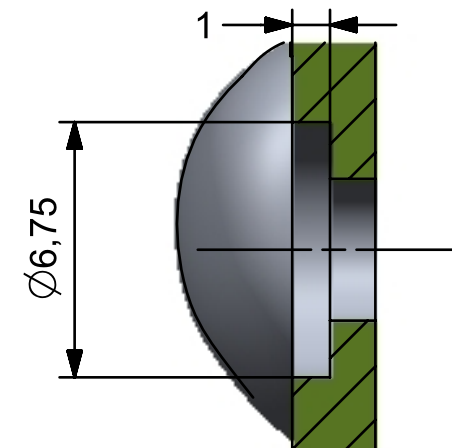



SECTION D-D

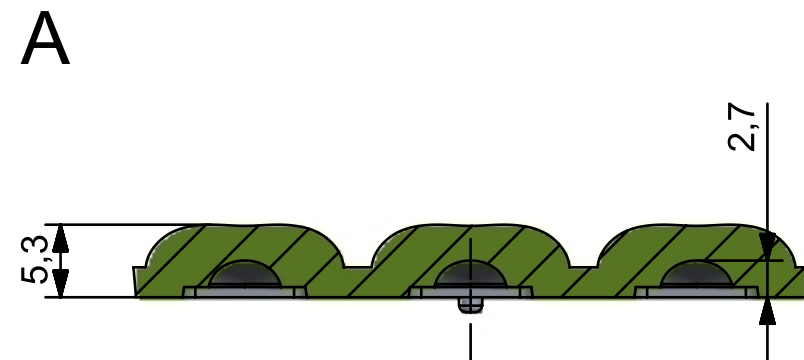

SECTION A-A

- Lens Material : Polycarbonate(Makrolon 2407&2647/Teijin 1225Z)
- Operating Temperature : PC: -40°C~+110°C(Upper Limit +120°C)
- UL Flammability : PC 2407/1225Z: V-2 @0.75mm & HB @2.7mm
- UL RTI Elec : PC 2407/1225Z: 125°C @1.5mm
- Light Transmission Rate 400nm~900nm > 90%

<div><p>BEACON OPTRONICS The Shape of light</p></div>			<p>Plastic Moulding Genral Tolerances if not otherwise shown According to DIN ISO 2768-1 Linear measures: up to 30mm class M, otherwise class C According to DIN ISO 2768-2 Form and position: class L</p>			<p>DO NOT SCALE DRAWING</p>			<p>FIRST ANGLE PROJECTION</p> <div></div>		
						<p>BEACON OPTRONICS</p>					
			<p>NAME</p>			<p>SIGNATURE</p>			<p>DATE</p>		
<p>DRAWN</p>			<p>RIJWAN</p>			<p>RIJWAN</p>			<p>03-12-2024</p>		
<p>CHKD</p>			<p>YASH</p>			<p>YASH</p>			<p>03-12-2024</p>		
<p>APPVD</p>			<p>PRADYUMNA</p>			<p>PRADYUMNA</p>			<p>03-12-2024</p>		
<p>MATERIAL</p>			<p>Polycarbonate (Makrolon 2407 , Teijin 1225Z)</p>								
<p>1:-All Dimensions are in mm 2:-Open Tolerance is +/- 0.2</p>			<p>This drawing is the property of Beacon Optronics. It may not be reproduced, copied or communicated without a written agreement with Beacon Optronics.</p>			<p>DWG NO.</p>			<p>BO22</p>		
			<p>WEIGHT:</p>			<p>8gm</p>			<p>SCALE 1:1</p>		
									<p>SHEET 1 OF 1</p>		
									<p>A3</p>		
									<p>REVISION-00</p>		