




Top View

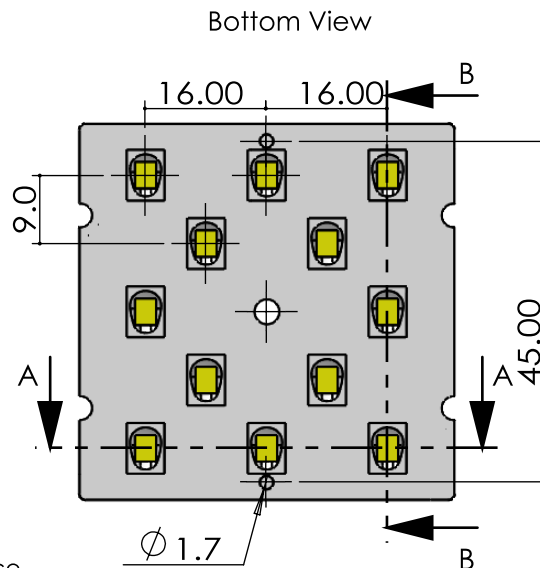


Bottom View





SECTION B-B

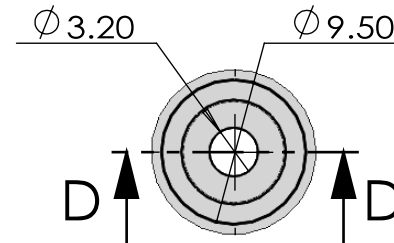


DETAIL C
SCALE 2 : 1



SECTION D-D
SCALE 2 : 1

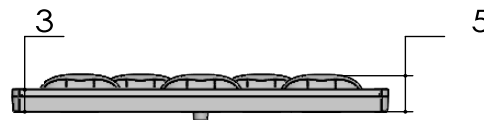



SECTION A-A

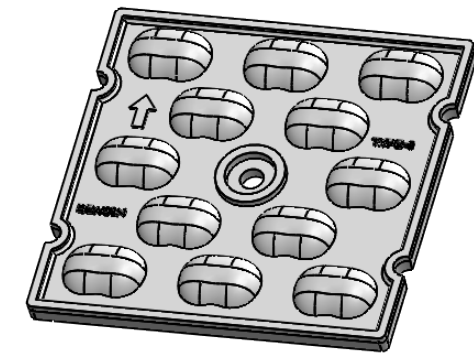

Isometric View

- Lens Material : Polycarbonate(Makrolon 2407&2647/Teijin 1225Z)
- Operating Temperature : PC: -40°C~+110°C(Upper Limit +120°C)
- UL Flammability : PC 2407/1225Z: V-2 @0.75mm & HB @2.7mm
- UL RTI Elec : PC 2407/1225Z: 125°C @1.5mm
- Light Transmission Rate 400nm~900nm > 90%

<div><div>BEACON OPTRONICS The Shape of Light</div></div>				<div>Plastic Moulding General Tolerances if not otherwise shown According to DIN ISO 2768-1 Linear measures: up to 30mm class M, otherwise class C According to DIN ISO 2768-2 Form and position: class L</div>				<div>DO NOT SCALE DRAWING</div>		<div>FIRST ANGLE PROJECTION</div> <div></div>	
								<div>BEACON OPTRONICS</div>			
	NAME		SIGNATURE		DATE		Family				
DRAWN	Ankur Sharma		Ankur Sharma		5.04.2023		<div>Polstar Series</div>				
CHK'D	Anuj Sharma		Anuj Sharma		5.04.2023						
APPVD	Pradyumna Shandilya		Pradyumna		5.04.2023		PRT NO. <div>B073-Polstar-12x1-2835,3030,3535-Type II</div>				
MATERIAL:	<div>polycarbonate(Makrolon 2407,Teijin 1225Z)</div>										
<div>1:-All Dimensions are in mm 2:-Open Tolerance is +/- 0.2</div>	<div>This drawing is the property of Beacon Optronics. It may not be reproduced, copied or communicated without a written agreement with Beacon Optronics.</div>						<div>Bo73</div>		<div>A4</div>		
							REVISION:00				
	WEIGHT: 8.0Gm		SCALE:1:1				SHEET 1 OF 1				

NAME	SIGNATURE	DATE
DRAWN	Ankur Sharma	5.04.2023
CHK'D	Anuj Sharma	5.04.2023
APPV'D	Pradyumna Shandilya	5.04.2023
MATERIAL: polycarbonate(Makrolon 2407,Teijin 1225Z)		
This drawing is the property of Beacon Optronics. It may not be reproduced, copied or communicated without a written agreement with Beacon Optronics.		
WEIGHT: 8.0Gm SCALE: 1:1		