
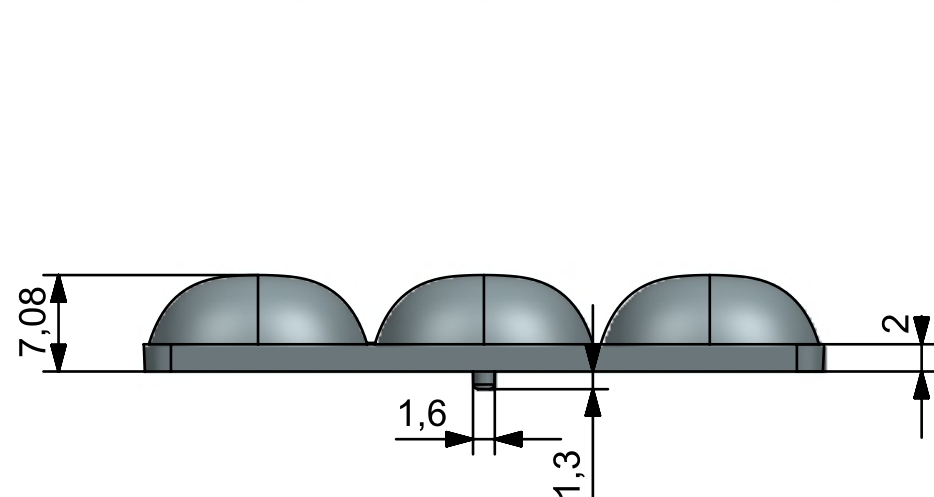
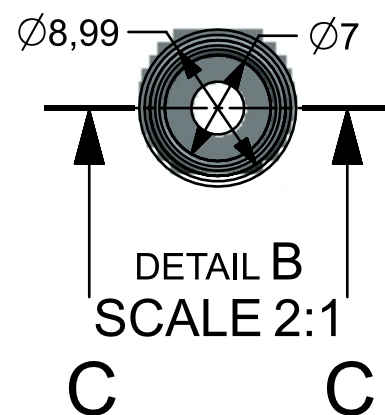
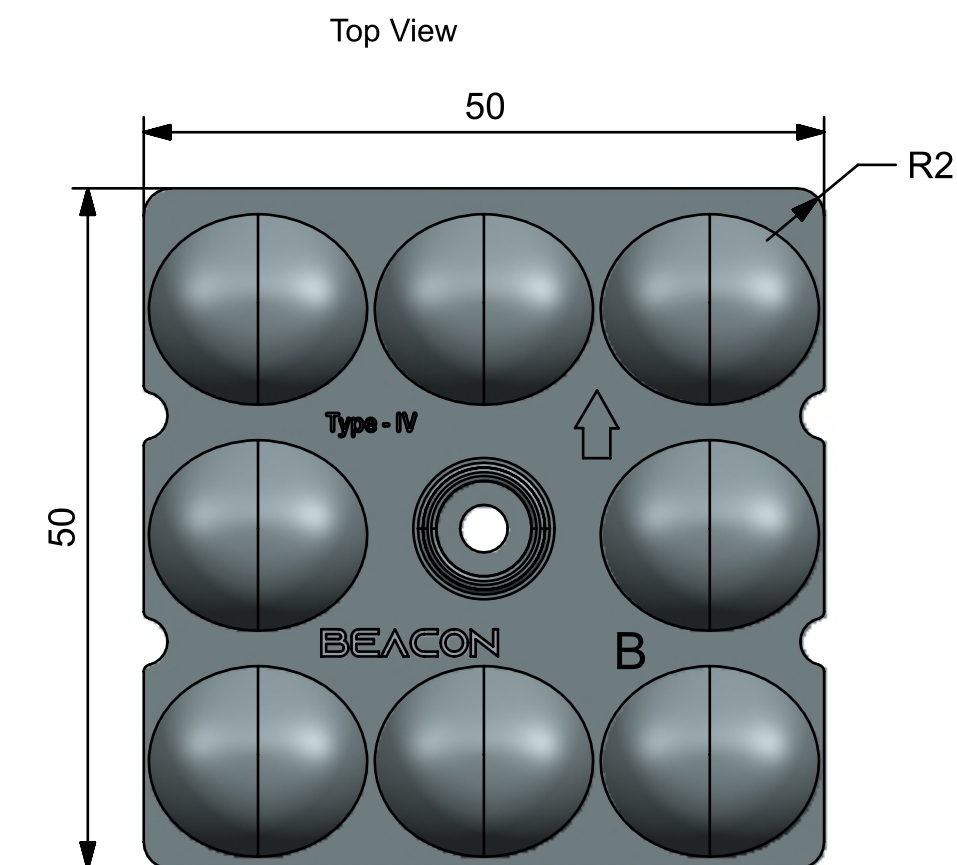
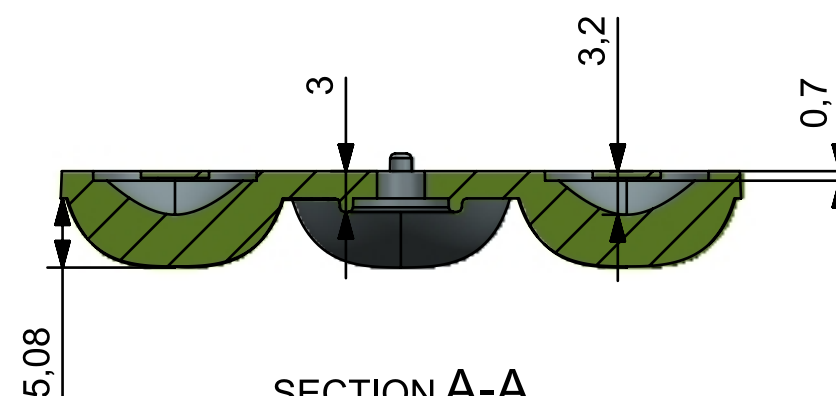
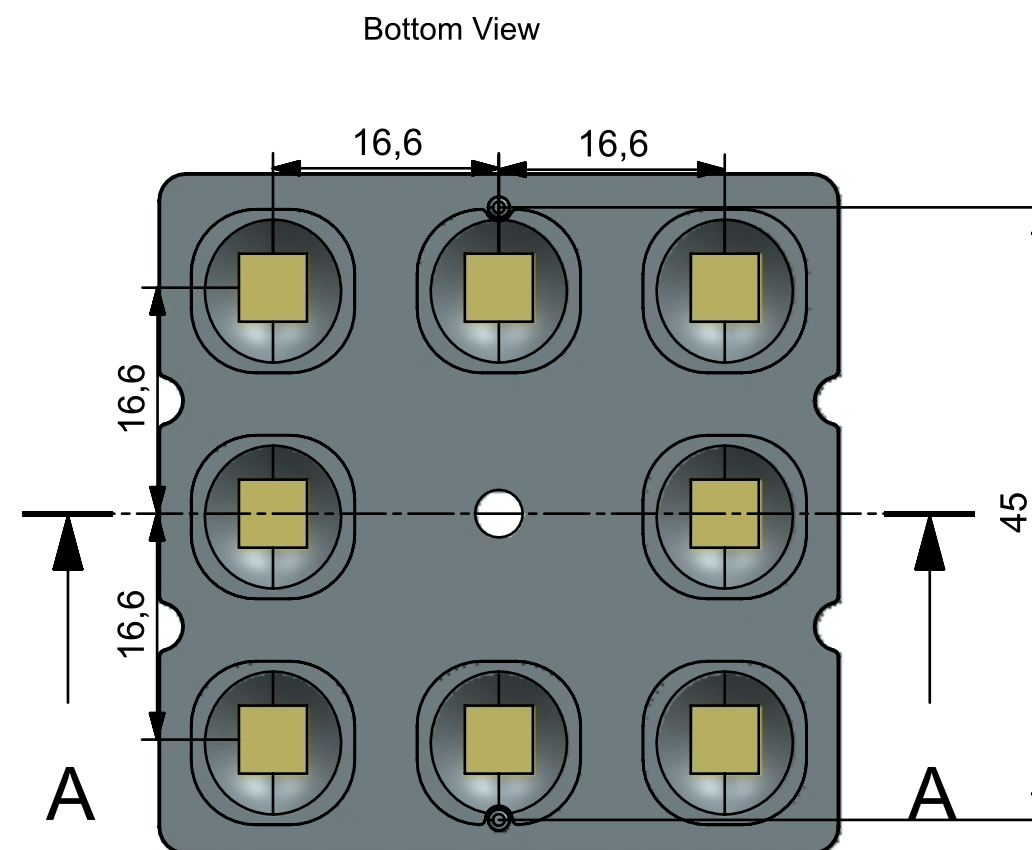


SECTION C-C



SECTION A-A

- Lens Material : Polycarbonate(Makrolon 2407&2647/Teijin 1225Z)
- Operating Temperature : PC: -40°C~+110°C(Upper Limit +120°C)
- UL Flammability : PC 2407/1225Z: V-2 @0.75mm & HB @2.7mm
- UL RTI Elec : PC 2407/1225Z: 125°C @1.5mm
- Light Transmission Rate 400nm~900nm > 90%

 BEACON OPTRONICS The Shape of light			Plastic Moulding Genral Tolerances if not otherwise shown According to DIN ISO 2768-1 Linear measures: up to 30mm class M, otherwise class C According to DIN ISO 2768-2 Form and position: class L			DO NOT SCALE DRAWING			FIRST ANGLE PROJECTION 			
						BEACON OPTRONICS						
			NAME			SIGNATURE			DATE			
DRAWN			AMIR			AMIR			23-03-26			
CHKD			YASH			YASH			23-03-26			
APPVD			PRADYUMNA			PRADYUMNA			23-03-26			
MATERIAL			Polycarbonate (Makrolon 2407 , Teijin 1225Z)			PRT NO. BO377-Jupiter-8x1-5050-Type-IV						
1-:All Dimensions are in mm 2-:Open Tolerance is +/- 0.2			This drawing is the property of Beacon Optronics. It may not be reproduced, copied or communicated without a written agreement with Beacon Optronics.									DWG NO.
WEIGHT:			9gm			SCALE 1:1			SHEET 1 OF 1			REVISION-00

	NAME	SIGNATURE	DATE
DRAWN	AMIR	AMIR	23-03-26
CHKD	YASH	YASH	23-03-26
APPVD	PRADYUMNA	PRADYUMNA	23-03-26
MATERIAL	Polycarbonate (Makrolon 2407 , Teijin 1225Z)		
1:-All Dimensions are in mm 2:-Open Tolerance is +/- 0.2	This drawing is the property of Beacon Optronics. It may not be reproduced, copied or communicated without a written agreement with Beacon Optronics.		
WEIGHT:		9gm	