
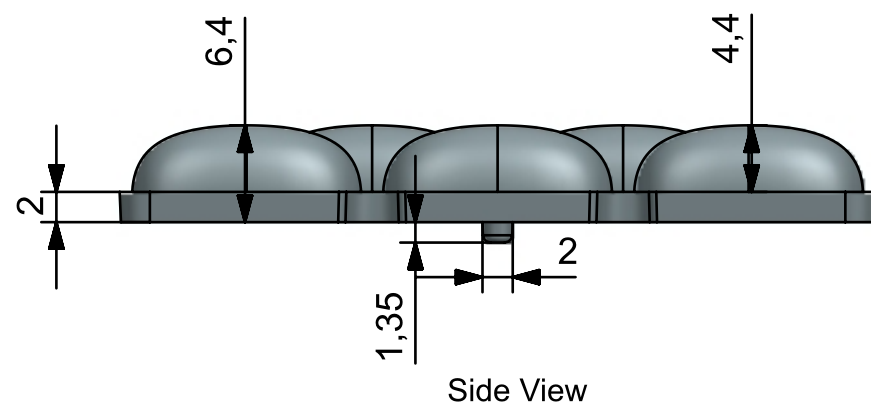
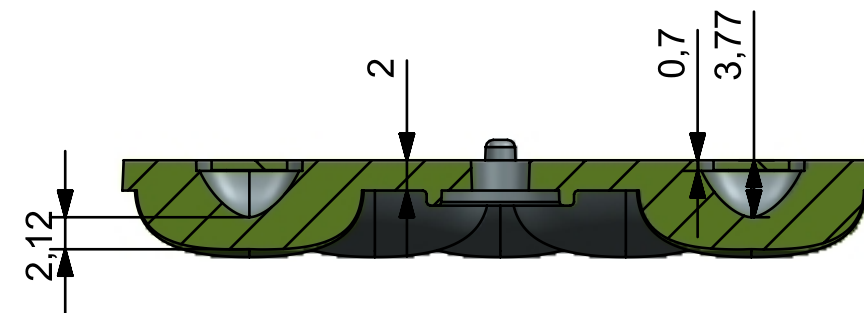
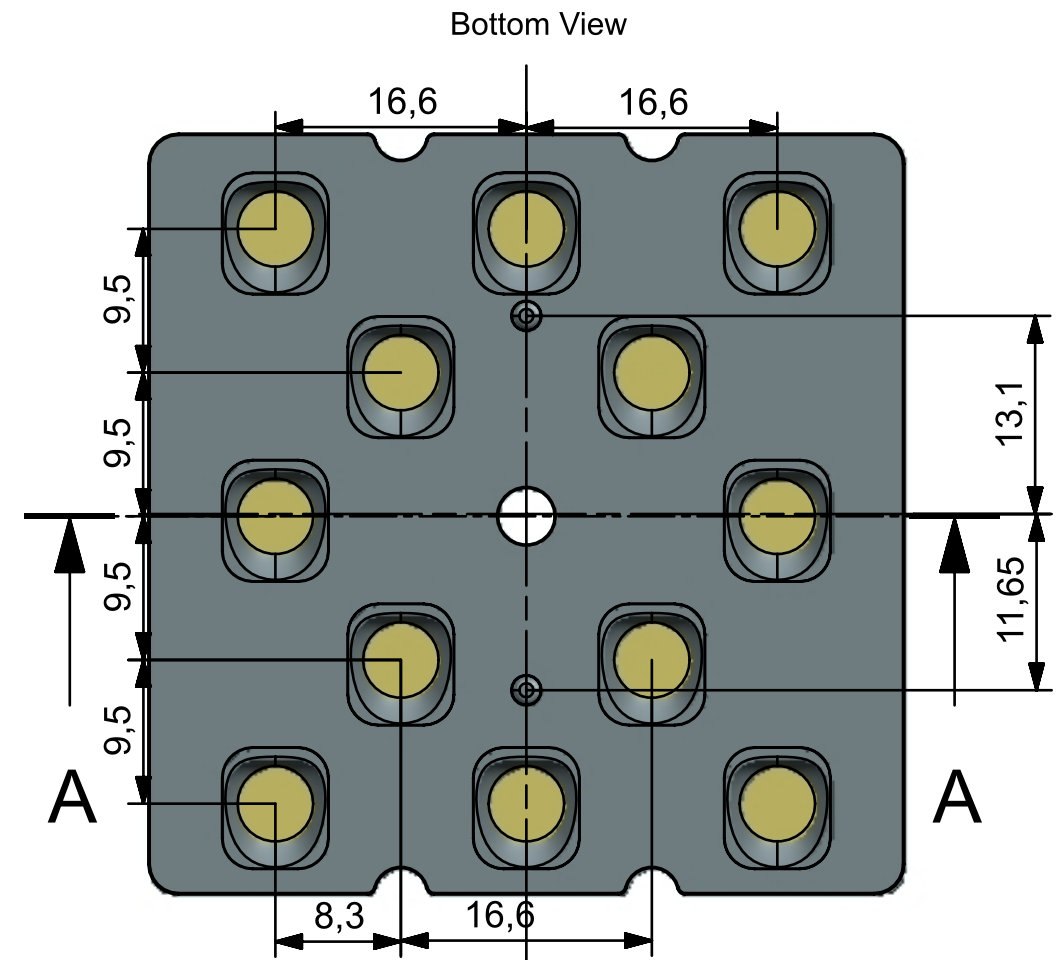
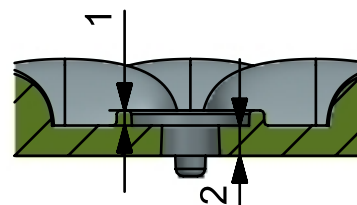
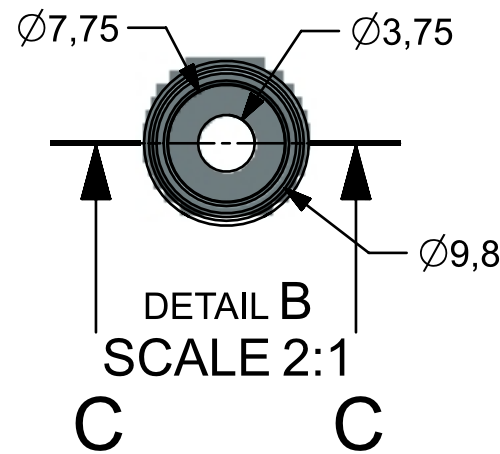
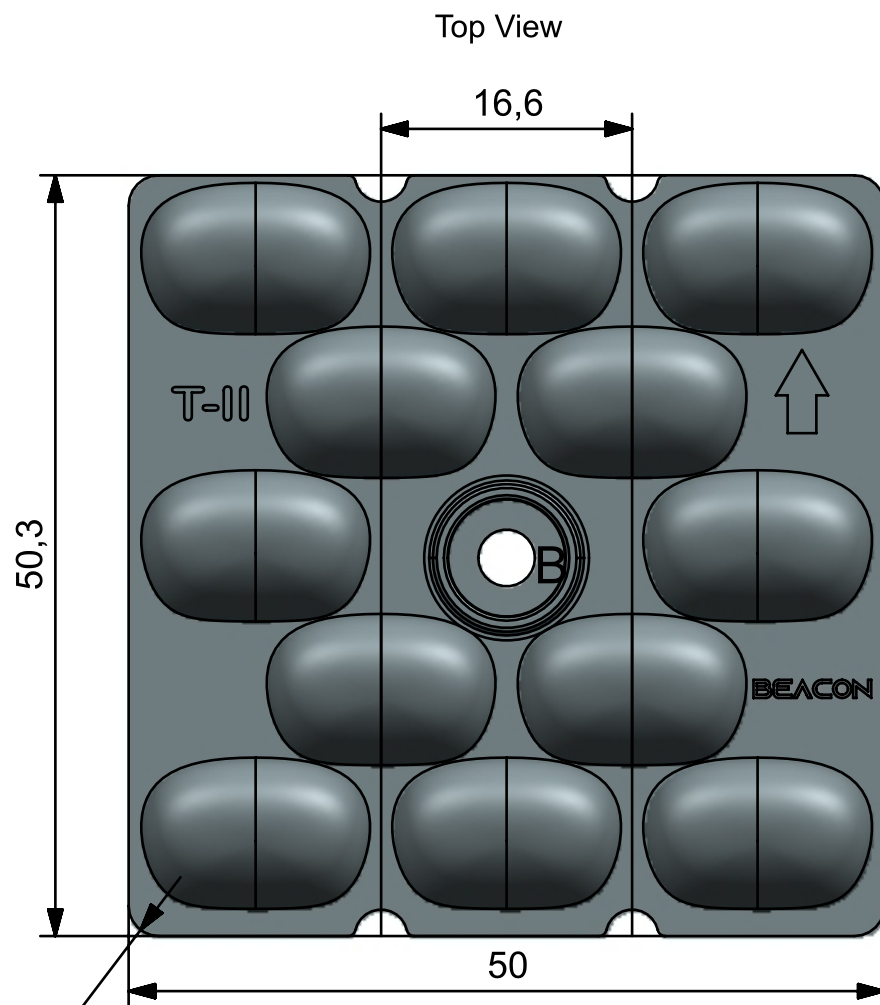




- Lens Material : Polycarbonate(Makrolon 2407&2647/Teijin 1225Z)
- Operating Temperature : PC: -40°C~+110°C(Upper Limit +120°C)
- UL Flammability : PC 2407/1225Z: V-2 @0.75mm & HB @2.7mm
- UL RTI Elec : PC 2407/1225Z: 125°C @1.5mm
- Light Transmission Rate 400nm~900nm > 90%

 BEACON OPTRONICS The Shape of light			Plastic Moulding Genral Tolerances if not otherwise shown According to DIN ISO 2768-1 Linear measures: up to 30mm class M, otherwise class C According to DIN ISO 2768-2 Form and position: class L			DO NOT SCALE DRAWING			FIRST ANGLE PROJECTION 				
						BEACON OPTRONICS							
	NAME		SIGNATURE		DATE		Family						
DRAWN		AMIR		AMIR		23-03-26		Polstar Series					
CHKD		RIJWAN		RIJWAN		23-03-26							
APPVD		PRADYUMNA		PRADYUMNA		23-03-26		PRT NO.					
MATERIAL		Polycarbonate (Makrolon 2407 , Teijin 1225Z)					BO383-Polstar-12x1-5050-T2						
1:-All Dimensions are in mm 2:-Open Tolerance is +/- 0.2		This drawing is the property of Beacon Optronics. It may not be reproduced, copied or communicated without a written agreement with Beacon Optronics.					DWG NO.				A3		
											REVISION-00		
		WEIGHT: 10gm					SCALE 1:1			SHEET 1 OF 1			