
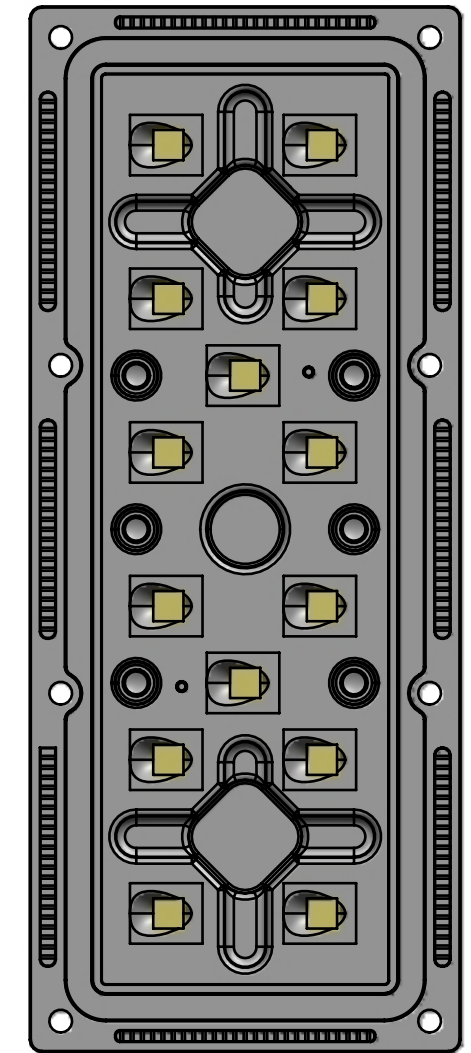
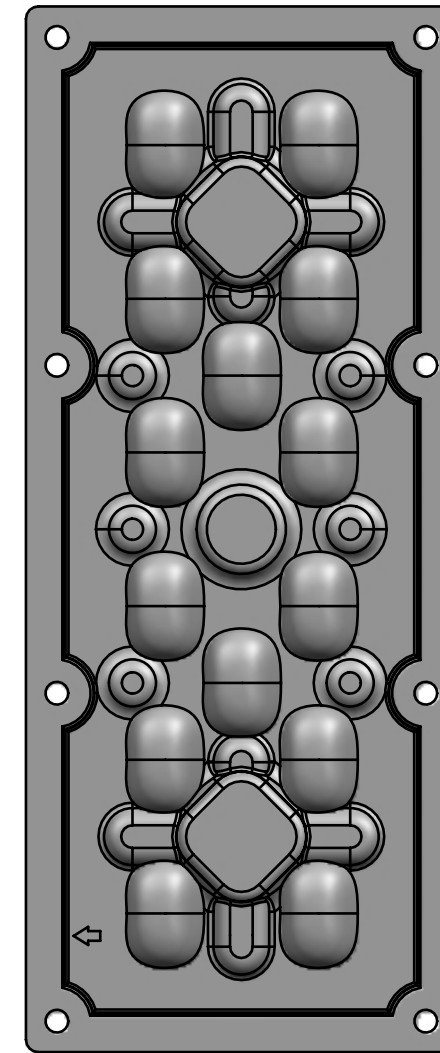
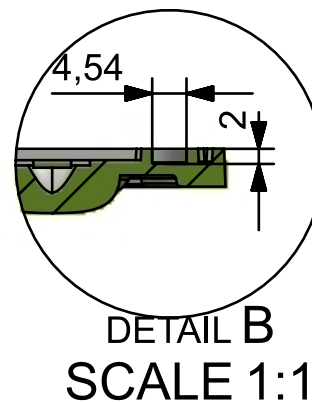
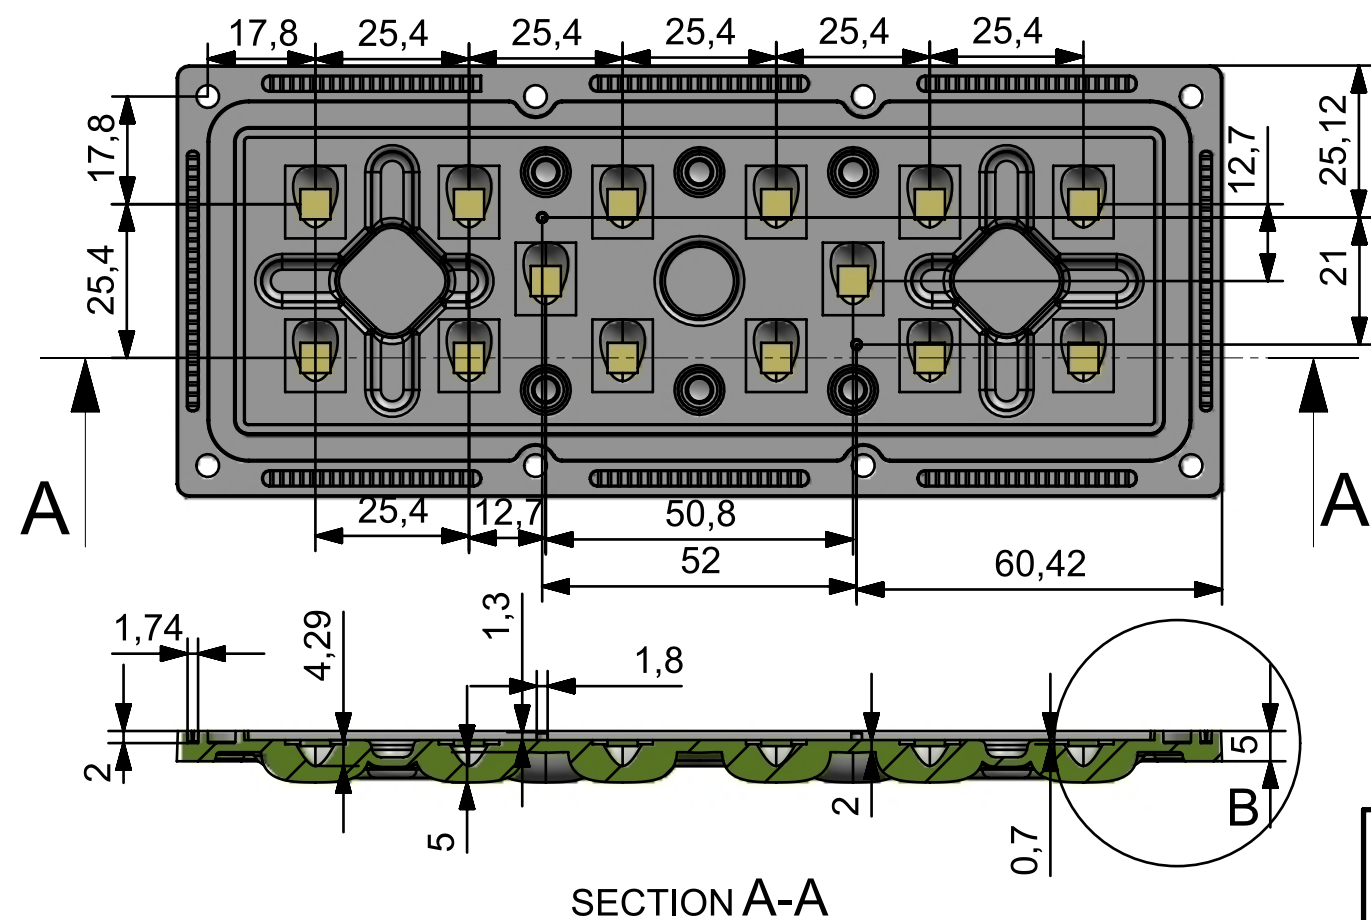
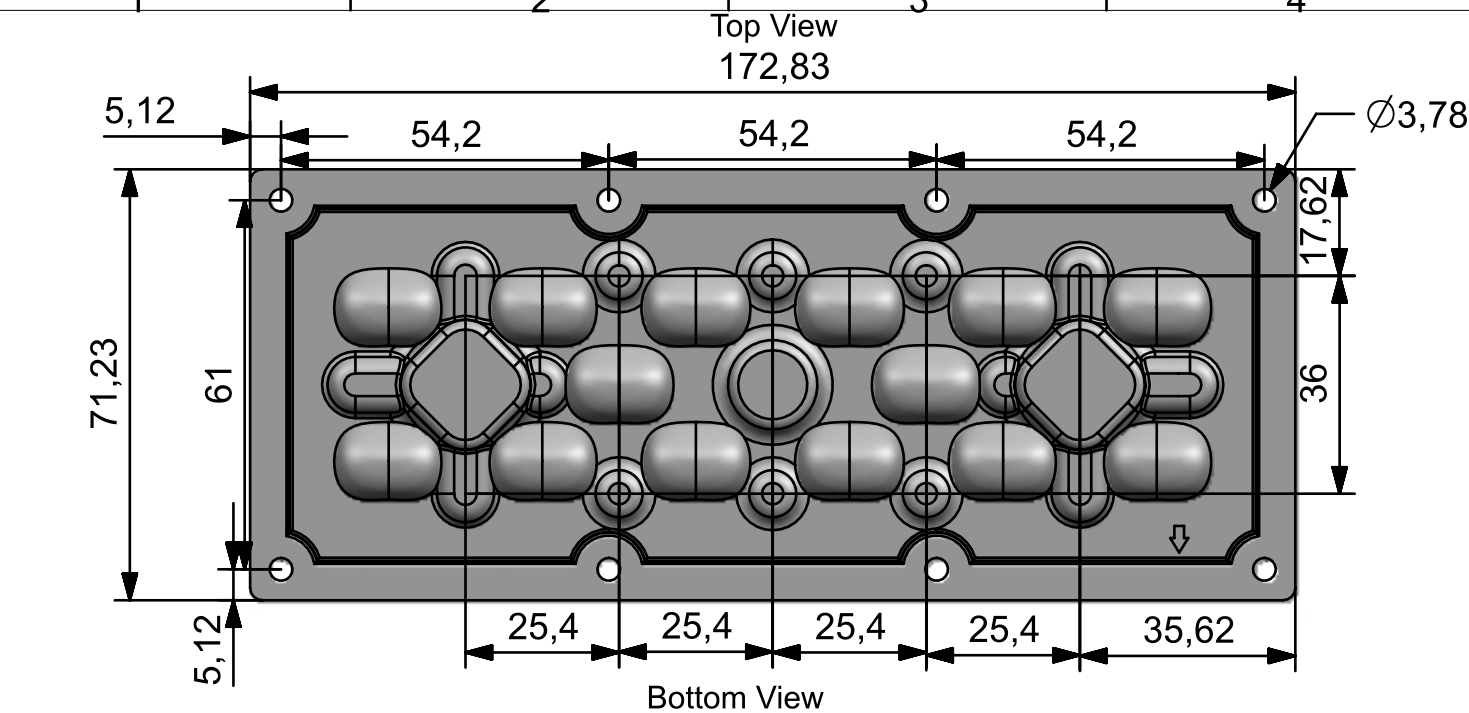




- Lens Material : Polycarbonate(Makrolon 2407&2647/Teijin 1225Z)
- Operating Temperature : PC: -40°C~+110°C(Upper Limit +120°C)
- UL Flammability : PC 2407/1225Z: V-2 @0.75mm & HB @2.7mm
- UL RTI Elec : PC 2407/1225Z: 125°C @1.5mm
- Light Transmission Rate 400nm~900nm > 90%

 BEACON OPTRONICS The Shape of light			Plastic Moulding Genral Tolerances if not otherwise shown According to DIN ISO 2768-1 Linear measures: up to 30mm class M, otherwise class C According to DIN ISO 2768-2 Form and position: class L			DO NOT SCALE DRAWING		FIRST ANGLE PROJECTION 	
						BEACON OPTRONICS			
	NAME	SIGNATURE	DATE	Family					
DRAWN	AMIR	AMIR	08-06-26	Galaxy Series					
CHKD	RIJWAN	RIJWAN	08-06-26						
APPVD	PRADYUMNA	PRADYUMNA	08-06-26	PRT NO. BO410-Galaxy-14x1-5050-T2					
MATERIAL	Polycarbonate (Makrolon 2407 , Teijin 1225Z)								
1-All Dimensions are in mm 2-Open Tolerance is +/- 0.2	This drawing is the property of Beacon Optronics. It may not be reproduced, copied or communicated without a written agreement with Beacon Optronics.			DWG NO.			A3		
				BO410			REVISION-00		
	WEIGHT:		46gm	SCALE 1:1		SHEET 1 OF 1			