
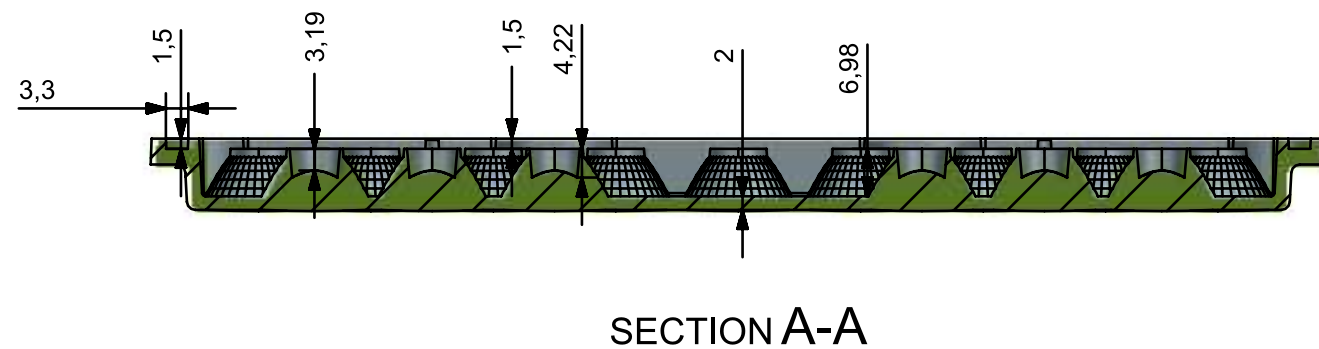
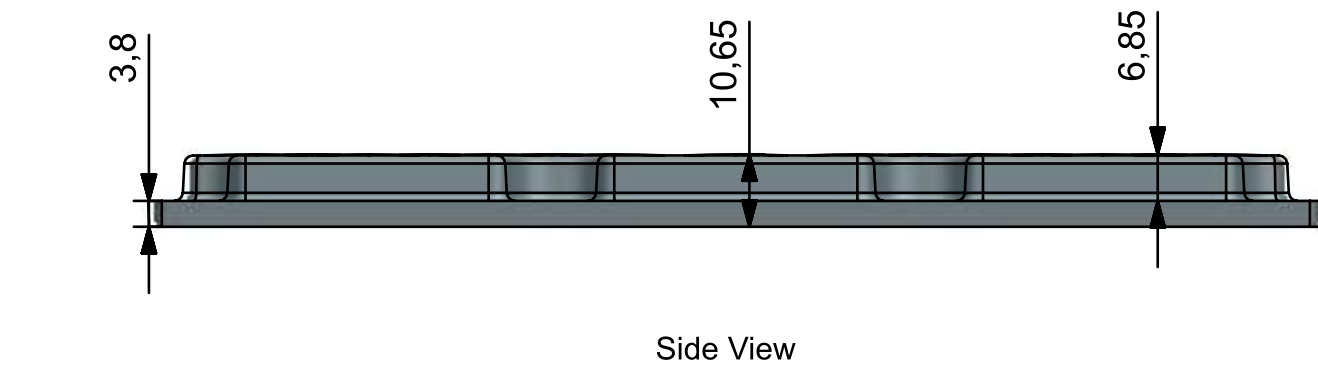
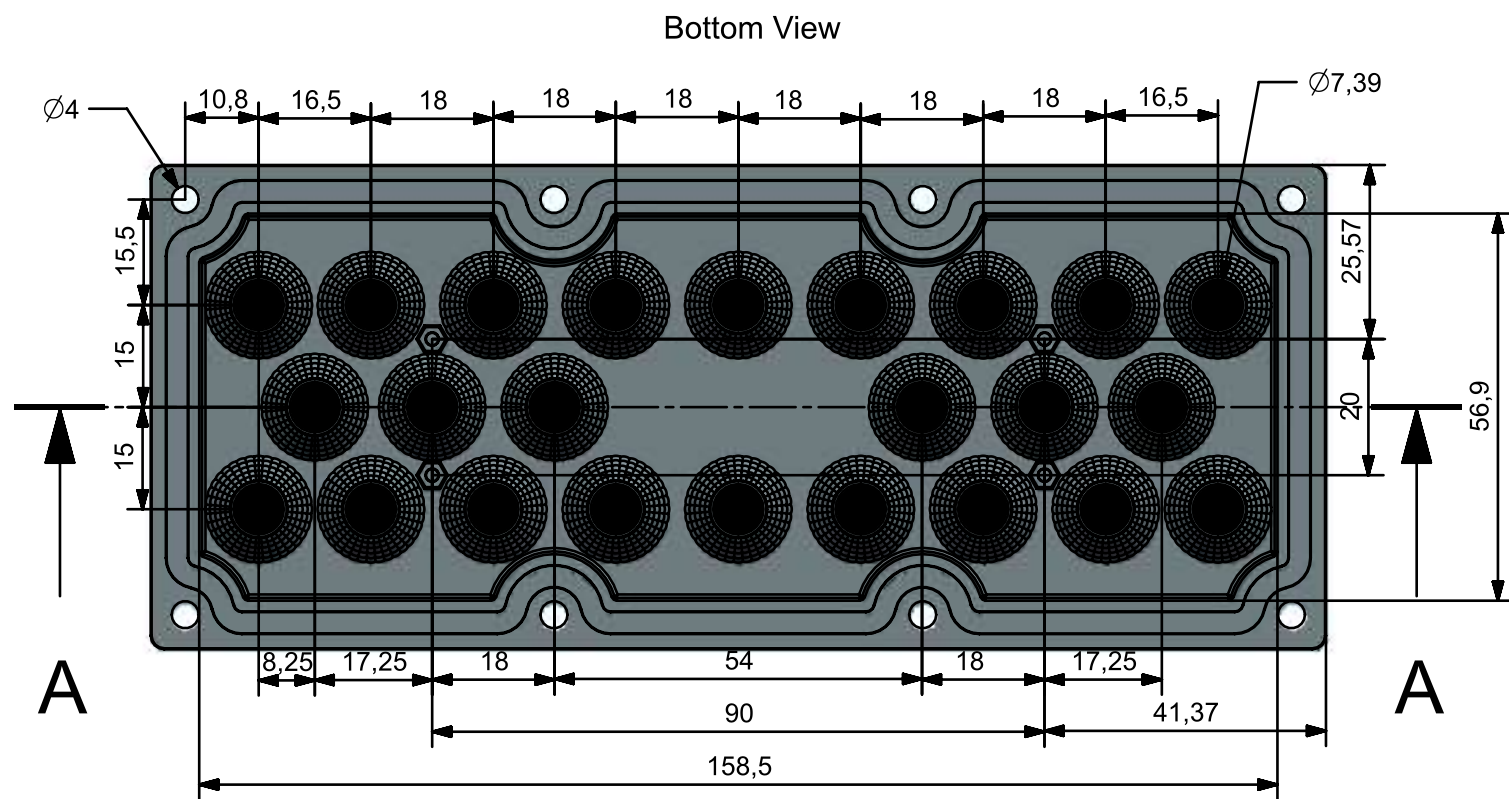
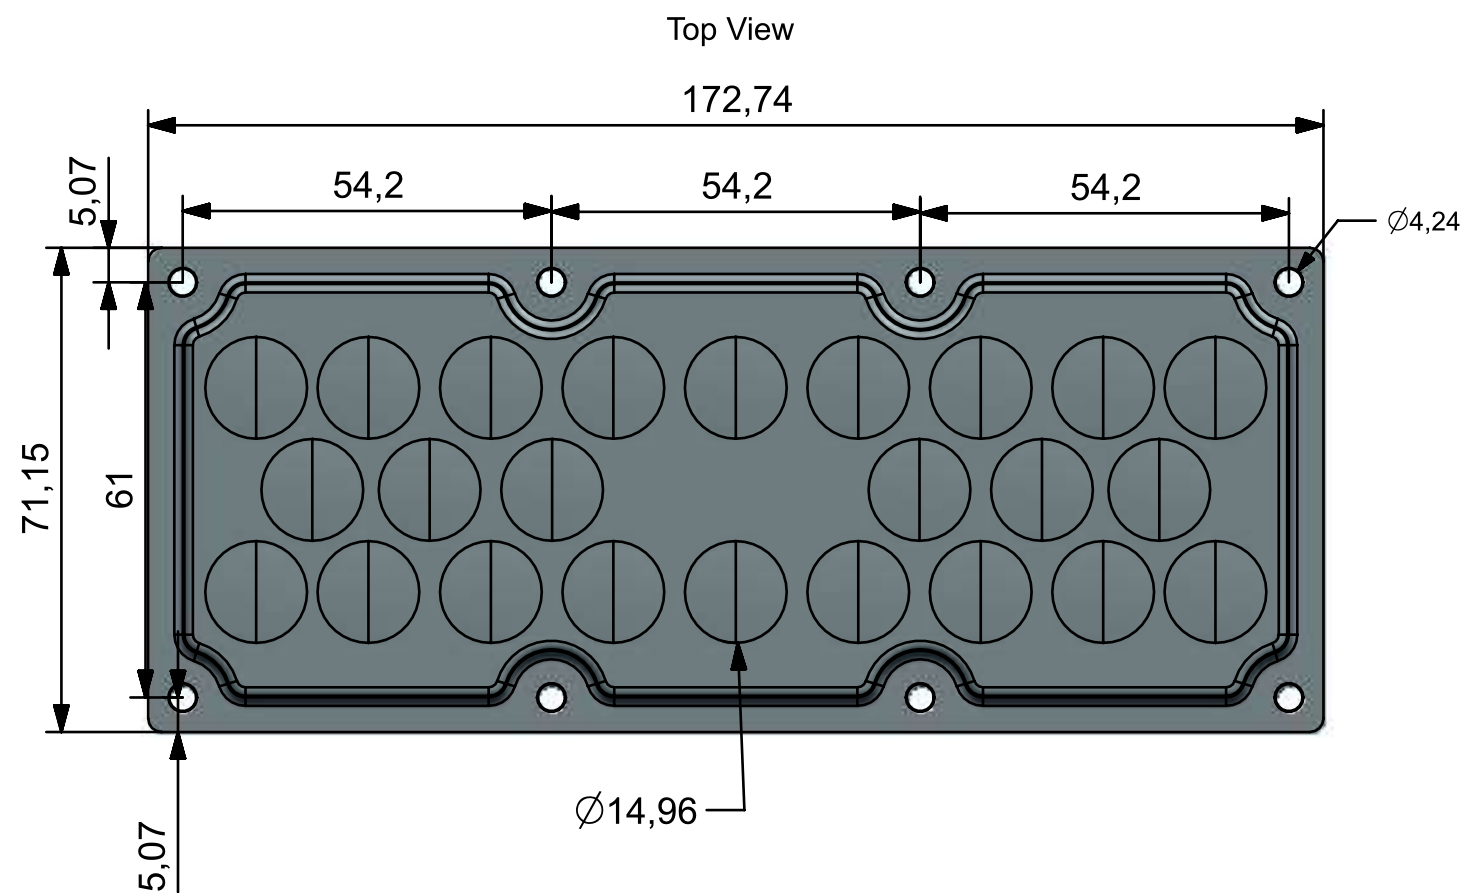




- Lens Material : Polycarbonate(Makrolon 2407&2647/Teijin 1225Z)
- Operating Temperature : PC: -40°C~+110°C(Upper Limit +120°C)
- UL Flammability : PC 2407/1225Z: V-2 @0.75mm & HB @2.7mm
- UL RTI Elec : PC 2407/1225Z: 125°C @1.5mm
- Light Transmission Rate 400nm~900nm > 90%

 BEACON OPTRONICS The Shape of light			Plastic Moulding Genral Tolerances if not otherwise shown According to DIN ISO 2768-1 Linear measures: up to 30mm class M, otherwise class C According to DIN ISO 2768-2 Form and position: class L			DO NOT SCALE DRAWING		FIRST ANGLE PROJECTION 	
BEACON OPTRONICS									
		NAME	SIGNATURE	DATE	Family			Galaxy Series	
DRAWN		AMIR	AMIR	06-08-26	PRT NO.			BO224-Galaxy-24x1-5050-25°	
CHKD		RIJWAN	RIJWAN	06-08-26					
APPVD		PRADYUMNA	PRADYUMNA	06-08-26					
MATERIAL		Polycarbonate (Makrolon 2407 , Teijin 1225Z)			DWG NO.			BO224	
1--All Dimensions are in mm 2--Open Tolrance is +/- 0.2		This drawing is the property of Beacon Optronics. It may not be reproduced, copied or communicated without a written agreement with Beacon Optronics.							
		WEIGHT: 61gm			SCALE 1:1			SHEET 1 OF 1	
								A3	
								REVISION-00	