



Top View

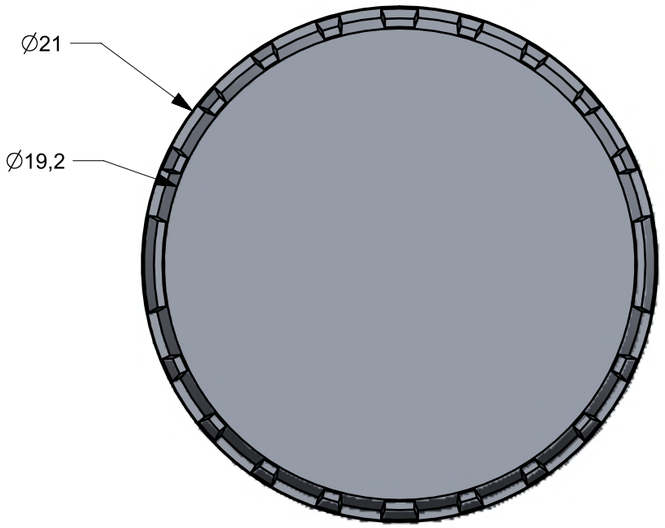


Bottom View

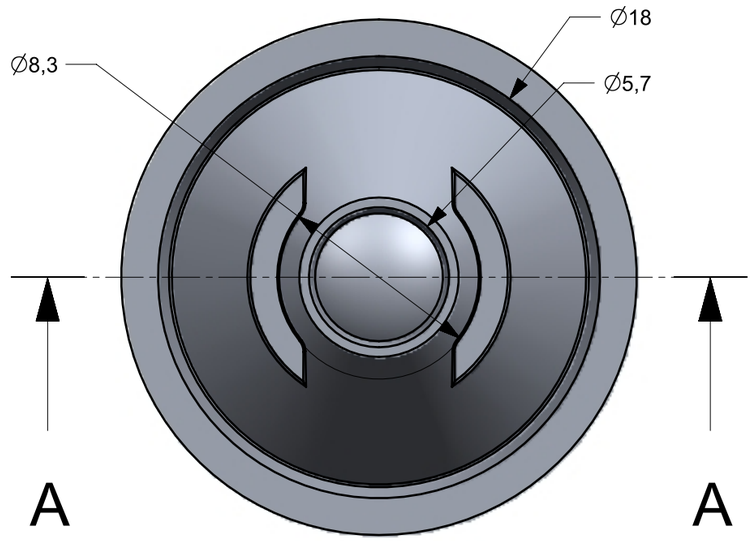

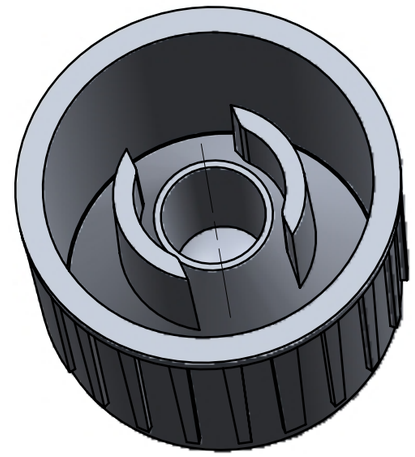

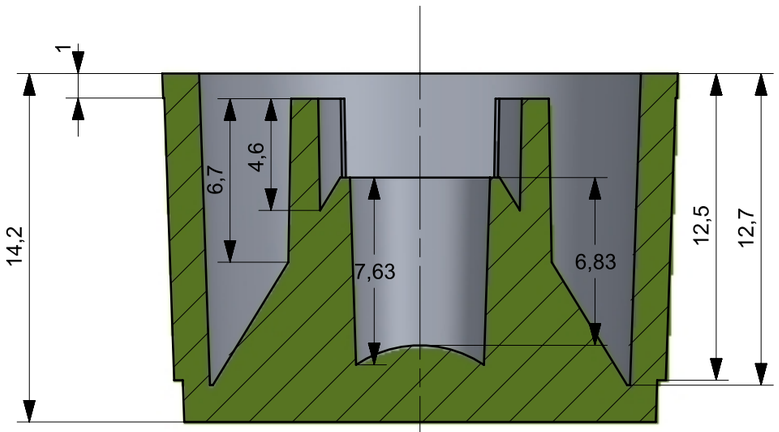

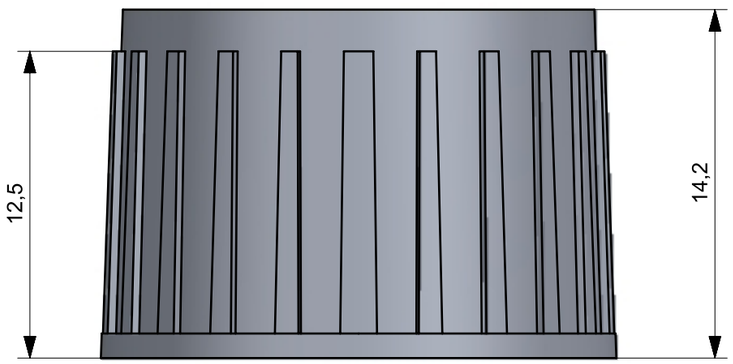

Side View

- Lens Material : Polycarbonate(Makrolon 2407&2647/Teijin 1225Z)
- Operating Temperature : PC: -40°C~+110°C(Upper Limit +120°C)
- UL Flammability : PC 2407/1225Z: V-2 @0.75mm & HB @2.7mm
- UL RTI Elec : PC 2407/1225Z: 125°C @1.5mm
- Light Transmission Rate 400nm~900nm > 90%

SECTION A-A

BEACON OPTRONICS
The Shape of light

Plastic Moulding Genral Tolerances if not otherwise shown According to DIN ISO 2768-1 Linear measures: up to 30mm class M, otherwise class C According to DIN ISO 2768-2

Form and position: class L

	NAME	SIGNATURE	DATE
DRAWN	RIJWAN	RIJWAN	03-12-2024
CHKD	YASH	YASH	03-12-2024
APPVD	PRADYUMNA	PRADYUMNA	03-12-2024
MATERIAL	Polycarbonate (Makrolon 2407 , Teijin 1225Z)		

1-:All Dimensions are in mm
2-:Open Tolrance is +/- 0.2

This drawing is the property of Beacon Optronics. It may not be reproduced, copied or communicated without a written agreement with Beacon Optronics.

WEIGHT: 3gm

DO NOT SCALE DRAWING

FIRST ANGLE PROJECTION

BEACON OPTRONICS

Family: **Sunbeam Series**

PRT NO. **BO80-Sunbeam-1X1-Emitter-3535-15D**

DWG NO. **BO80**

A3

REVISION-00

SCALE 1:1

SHEET 1 OF 1